






BILOBA

8010

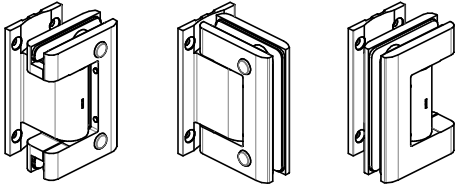


Tools Required
Strumenti Richiesti
Benötigtes Werkzeug

Fittings required
Fissaggi richiesti
Benötigtes Befestigungsmaterial

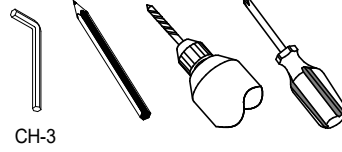

8 ÷ 13.52



GLASS
VETRO
GLAS






Queste viti sono serrate a 10Nm dalla fabbrica, e' vietato svitarle o allentarle



These screws are tightened at 10 Nm from the factory, it is forbidden to unscrew or loosen them










Gasket
Guarnizioni
Zwischenlagen

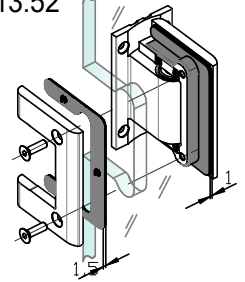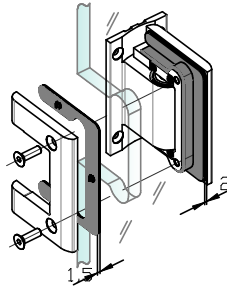


10 Nm


1

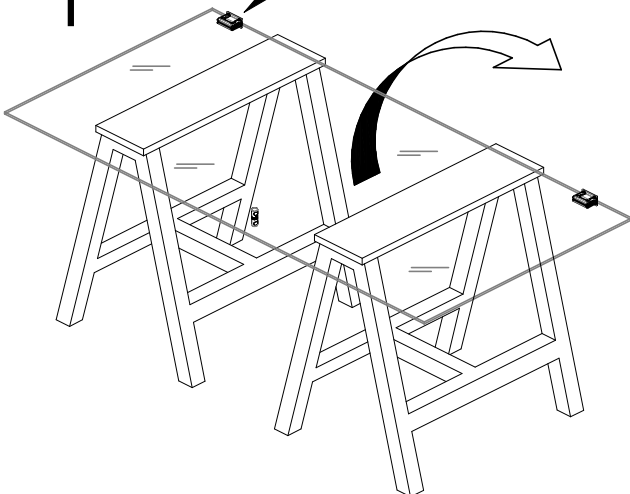


2





3

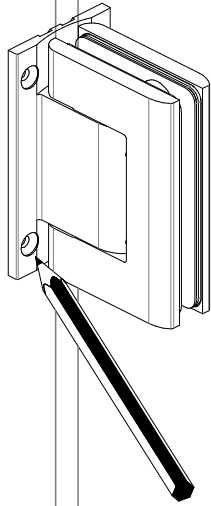

4

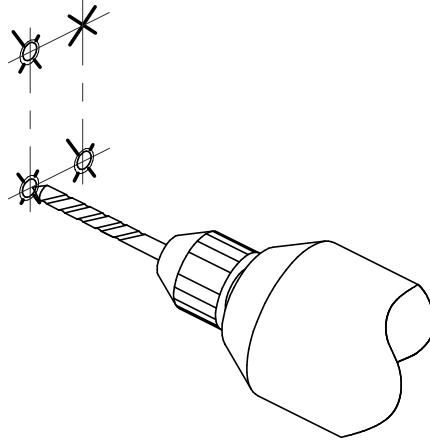

5

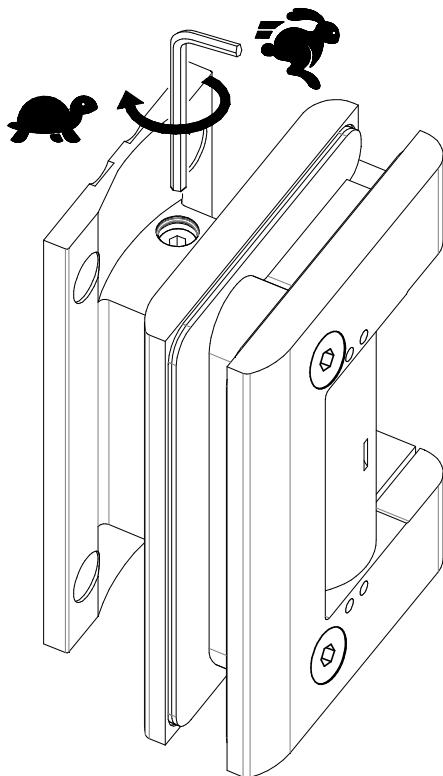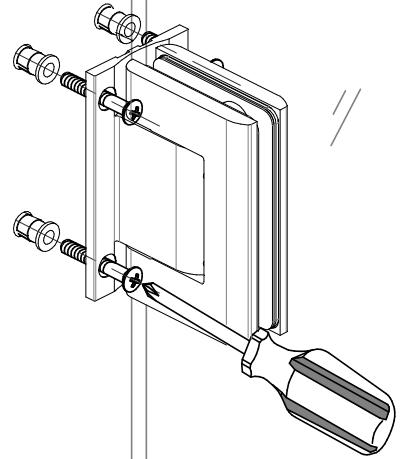

CLOSING SPEEDADJUSTING
REGOLAZIONE TEMPO DI CHIUSURA
SCHLIEßGESCHWINDIGKEITSEINSTELLUNG

Not for SOL version
Non per la versione SOL
Nicht für SOL version

